

Edge of Arlington Saw & Tool, Inc.

124 South Collins
Arlington, TX 76010

Phone: 817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com




Amana Tool Hollow Ground 6° Negative Hook

Thank you for shopping with us!

The specially designed saw blade makes exceptionally smooth cuts in melamine and other coated boards, without the need for scoring. The unique hollow grind, which pairs a triple-chip tooth with a raker tooth that's ground to a concave profile, produces crisp clean cuts. The grind is commonly used in vertical panel saws, such as those made by Striebig® and Holz-Her®. The negative hook angle is particularly suitable for vertical panel saws. **Note: P.H. denotes pin-hole configuration, if applicable. Example: 2/10/60 = 2 @ 10mm dia on 60mm circle.**

Warning: Before use, read saw blade safety guidelines in [Amana's catalog](#).

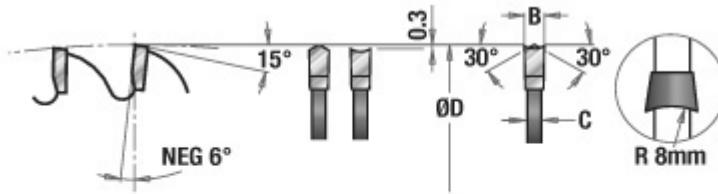

Item #	Manufacturer	Diameter	Bore	Grind	Kerf	Machine	Pinholes	Plate	Teeth	Hook Angle	Price
HG10480	Amana Tool	10 in (253 mm)	5/8 in	Hollow Ground (HG)	0.126 in	--	--	0.087 in	48	6 deg negative hook	\$156.71

HG10480-30	Amana Tool	10 in (253 mm)	30 mm	Hollow Ground (HG)	0.126 in	Holz-Her	2/7/42 & 2/10/60	0.087 in	48	6 deg negative hook	\$156.71
HG12600-30	Amana Tool	12 in (303 mm)	30 mm	Hollow Ground (HG)	0.126 in	Holz-Her	2/7/42 & 2/10/60	0.087 in	60	6 deg negative hook	\$200.93
HG220T420	Amana Tool	220mm	30mm	Hollow Ground (HG)	0.126 in	Holz-Her	2/7/42	0.126 in	42	6 deg negative hook	\$