

## Edge of Arlington Saw & Tool, Inc.

124 South Collins


Arlington, TX 76010

Phone: 817-461-7171 • Fax: 817-795-6651

Toll Free: 888-461-7171

Email: [info@eoasaw.com](mailto:info@eoasaw.com)

Website: [www.eoasaw.com](http://www.eoasaw.com)

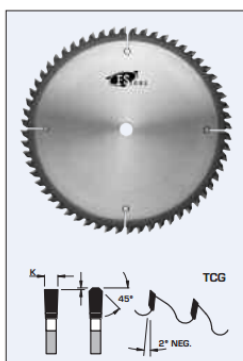

### FS Tool Industrial Quality Saw Blades for Non-Ferrous Metals: TCG

Thank you for shopping with us!

FS Tool's offering of industrial saw blades represents the state of the art answers for today's woodworking cutting applications on North American and European machinery. Our product offering is the largest of its kind. Each saw blade has been developed to fulfill a specific cutting application. Each model has been developed with its own grades of materials (carbide and saw plate), its own cutting geometry (grind, hood angle, kerf), and its own operational enhancements (copper noise reducing plugs, cooling slots).

- Commitment to Development: meets the challenge of today's applications & materials
- Commitment to Quality: personal checking of saw blades at each step in our highly-automated manufacturing process
- Commitment to Value: competitive in a demanding and dynamic industrial marketplace

#### Design:

- Tooth configuration: TCG
- Cutting Material: TC
- Expansion slots: Cu Plugged

#### Application:

- For splitting & mitre jointing non-ferrous extrusions, sheets & light bars
- On mitre joint, splitting, trimming, double cross-cutting, and sizing machines
- Material to be cut must be firmly clamped
- Use of spray lubrication recommended

Item #	Diameter	Bore	Kerf	Manufacturer	Note	Plate	Teeth	Price
L1A180	7 in	5/8 in	.112 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.087 in	44	<b>\$125.76</b>
L1A200	8 in	5/8 in	.112 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.087 in	48	<b>\$134.48</b>
L1A225	9 in	5/8 in	.112 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.087 in	60	<b>\$164.08</b>

L1A250	10 in	5/8 in	.112 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.087 in	60	<b>\$156.96</b>
L1A252	10 in	5/8 in	.126 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.102 in	60	<b>\$173.00</b>
L1A308	12 in	5/8 in	.124 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.110 in	80	<b>\$228.20</b>
L1A300	12 in	1 in	.122 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.095 in	80	<b>\$205.64</b>
L1A350	14 in	1 in	.145 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.118 in	90	<b>\$263.76</b>
L1A400	16 in	1 in	.145 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.118 in	100	<b>\$314.00</b>
L1A450	18 in	1 in	.174 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.138 in	100	<b>\$387.72</b>
L1A500	20 in	1 in	.174 in	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.138 in	100	<b>\$462.60</b>