
Edge of Arlington Saw & Tool, Inc.

124 South Collins Arlington, TX 76010 Phone:817-461-7171 • Fax: 817-795-6651 Toll Free: 888-461-7171 Email: info@eoasaw.com Website: www.eoasaw.com

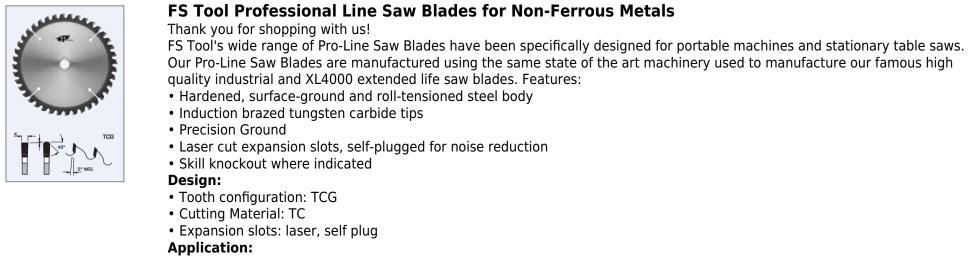

- For splitting and mitre jointing non-ferrous extrusions, thin sheets, and light non-ferrous bars
- On mitre and compound mitre saws
- Material to be cut must be firmly clamped
- · Use of spray lubrication recommended

Item #	Diameter	Bore	Kerf	Machine	Manufacturer	Note	Plate	Teeth	Price
LH743	7 1/4 in	5/8 in	.100 in		FS Tool	Diamond arbor knockout. Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.070 in	40	\$70.04
LH866	8 1/4 in	5/8 in		Black & Decker Mitre, Delta Compound Mitre, Ryobi Radial Arm	FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.070 in	60	\$120.72

LH868 8.5 in	5/8 in .100 in Elu Mitre, Hitachi Mitre FS Tool	Material to be cut must be firmly clamped. Use of spray lubrication is recommended.	.070 in 60	\$120.72
--------------	---	---	------------	----------