Edge of Arlington Saw & Tool, Inc.

124 South Collins Arlington, TX 76010


Phone:817-461-7171 • Fax: 817-795-6651

Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com



Produce super-clean smooth cuts, especially in acrylic materials (Plexiglas®, Lucite®), other plastics, and wood. Bits are made according to strict tolerances from an exclusive carbide grade and polished to a mirror finish using Amana's unique process. Ideal for industrial applications and CNC machines.

Excellent for cutting: plastic/acrylic, acrylonitrile butadiene styrene (ABS), alupanel®, acetal & nylon, corrugated polypropylene, delrin, gator board, foam board, high density polyethylene (HDPE), Lucite®, mechanical/engineered plastics, Plexiglas®, polycarbonates, solid surface, ultra high molecular weight polyethylene (UHMW), and wood.

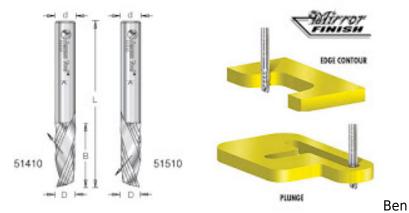

efits of Mirror-Finish: Razor sharp cutting edge. Effortless chip removal. Helps prevent chip re-welding. Extends tool life. Exceptional cut quality. Dissipates heat well and prevents melting.

*Router collet reducer RB-102 (1/4 to 1/8) available for 1/8 shank bits—see below to purchase separately.

SPECIFICATIONS	
Manufacturer	Amana Tool
Diameter	1/16 in

SPECIFICATIONS	
Cut Height, Length, or Width	1/4 in
Flute Geometry	Downcut
Flute	1
Includes	
Overall Length	2 in
Shank	1/8 in