

Edge of Arlington Saw & Tool, Inc.

124 South Collins
Arlington, TX 76010
Phone:817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com



Item #LU3E04, Freud® Saw Blades to Cut Bilaminated Panels: LU3E Series
\$136.31


Thank you for shopping with us!

Freud is one of the few manufacturers of woodworking tools in the world that produces its own Micrograin Carbide for each tool application.


Silent Sawblade. Anti-vibration Design. Silver I.C.E. Coating prevents build-up on the blade surface and keeps the blade running cooler and cleaner.

Machines: Circular saws, horizontal and vertical panel-sizing machines
Features: Flat triple-chip tooth with negative cutting angle
Material: Bilaminated panels

Ideal For: To size bilaminated panels without the employment of the scoring sawblade up to 40mm thick. In detail, it is suitable to work melamine-coated panels.




Tooth features - Caratteristiche del dente



Minimum and maximum RPM based on the blade diameter.
Fascia dei giri minimo e massimo consigliati in funzione del diametro della lama.



Working with spindle over the working plane
Lavorazione con albero sopra il piano di lavoro

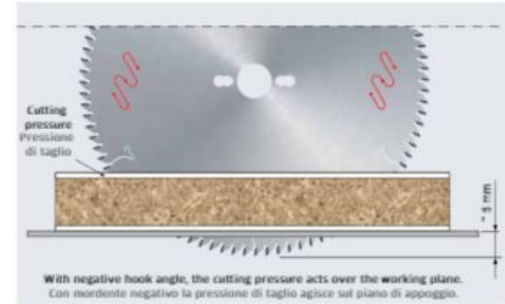

With negative hook angle, the cutting pressure acts over the working plane.
Con mordente negativo la pressione di taglio agisce sul piano di appoggio.

	Ultimate Eccellente	High Ottimo	Good Buono
Wood composites Compositi di legno			
Veneered Impiallacciati	●		
Laminates Laminati	●		

To peruse more comprehensive information on Freud® Tools Industrial Circular Saws—correct saw blade use, informational tips, technical information—click on the link to [Industrial Saw Blades Catalog](#).

SPECIFICATIONS	
Manufacturer	Freud Tools

SPECIFICATIONS	
Diameter	350 mm
Arbor	30 mm
Pinholes	2/9/46.4 + 2/10/60
Grind	TCG
Plate	2.5 mm
Kerf	3.5 mm
Teeth	84
Type	Sliding & Vertical Panel Sizing