

## Edge of Arlington Saw & Tool, Inc.

124 South Collins

Arlington, TX 76010

Phone:817-461-7171 • Fax: 817-795-6651

Toll Free: 888-461-7171

Email: [info@eoasaw.com](mailto:info@eoasaw.com)

Website: [www.eoasaw.com](http://www.eoasaw.com)




### Item #RC-2257, Amana Tool Insert Carbide Spoilboard Surfacing, Rabbeting, Flycutter, Slab Leveler & Surface Planer 2 1/2" Dia x 1/2" x 1/2" Shank Router Bit

**\$304.31**

Thank you for shopping with us! Designed for planing & rabbeting the following materials: -MDF -Fiberboard -HDF/LDF -Balsa Core\* -Epoxy (Epoxy Resins)\* -High Density Urethane (HDU Board)\* -Plastic/Acrylic\* -Plywood/Chipboard\* -Hardwood/Softwood\* -Ultra-High-Molecular-Weight Polyethylene (UHMWPE)\* \*For optimal results and maximum insert life, replace inserts with optional general purpose knives #AMA-12 (sold separately). **Featuring:**

- 4-sided solid carbide insert knives
- Exclusive carbide grade for highest quality of cut
- Maximum cutting efficiency
- Faster material removal process
- Longest tool life

These industrial router bits feature solid carbide insert knives with four cutting edges that allow users to flip the knife over when one side becomes dull, providing the highest-quality finish available on woodworking tools. Warning: Proper torques rating to tighten down screws is 2-3Nm Torques.

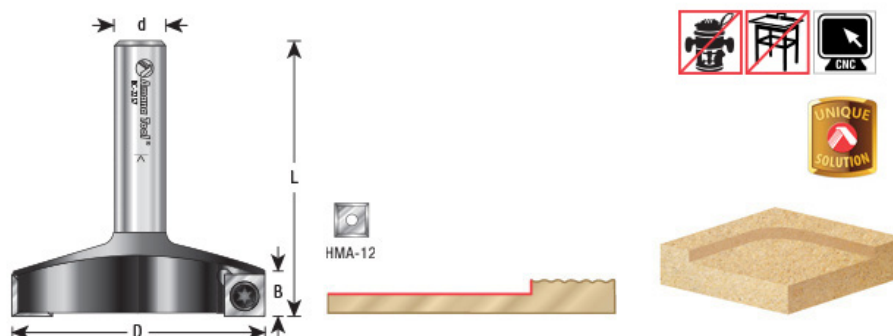

SPECIFICATIONS	
Manufacturer	Amana Tool
Cut Depth	1/4 in Max Cut Depth
Diameter	2 1/2 in
Cut Height, Length, or Width	1/2 in
Knives	HMA-12. Optional general purpose knives: AMA-12. Optional Solid Wood: AMA-12-DLC.
Overall Length	2 1/2 in
RPM	19,000
Shank	1/2 in

## SPECIFICATIONS

**Replacement Parts**

Screw #67110

**Note**

Warning: Proper Torques rating to tighten down screws is 2-3Nm  
Torques. CNC Use only.