

Edge of Arlington Saw & Tool, Inc.


124 South Collins
Arlington, TX 76010
Phone: 817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com



Item #658060C, Amana Tool Carbide-Tipped Electro-Blu™ Prestige™ Dado 8 Inch Dia x 24T H-ATB, 5/8 Bore, Complete Dado Set with Six 4-Wing Chippers \$324.05

Thank you for shopping with us!

With six 4-wing chippers 1/4" to 29/32" - High ATB Grind.



Our Prestige™ Dado Sets cut perfectly smooth edges, flat-bottom cuts, and grooves both along and across the grain that are free of splinters or rough edges. This dado set is part of the renowned Prestige™ line of superior performance blades.

Features the latest in cutting tool technology, including massive tool-steel plates and precision ground carbide teeth. The 8" diameter, 24-tooth outside plates are hollow ground for proper clearance and feature high ATB grind geometry with every sixth tooth flat ground for efficient chip removal. Each tooth body also features anti-kickback design to help prevent overfeeding.

Set accommodates today's undersized plywoods.



Packed in a handy black molded carrying case.


Each of the six interior chippers features four teeth, and the standard width capacity is 1/4" through 29/32". Adjustments can be easily made in 1/32" increments and even finer adjustments, as small as .002", can be made by using the supplied shim set. A [46-tooth dado set](#) is also available for use with plywood and melamine.

A stacking dado set is an ideal tool for cutting dados, grooves, and tenons for strong mortise and tenon joinery.

NOTE: Always use the outside blades. Never attempt to use the chippers without the outside blades.

*Teeth refers to the number of teeth for each outside saw blade.

Warning: Before use, read saw blade safety guidelines in [Amana's catalog](#).

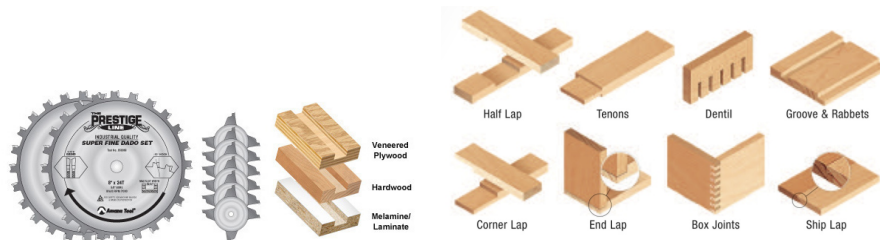

Benefits of

Electro-Blu™ Coating:
Reduces resin accumulation and heat buildup
Tips stay sharper longer resulting in extended blade life
Applied by using an electrostatic bonding process

SPECIFICATIONS

Manufacturer	Amana Tool
Bore	5/8 in
Diameter	8 in
Grind	H-ATB
Includes	1/8(x4), 3/32(x1), 1/16(x1) Chippers; 2 Outside 8 in x 24T Blades
Kerf	Range: 1/4 to 29/32 in
Note	Always use the outside blades. Never attempt to use the chippers without the outside blades. Teeth refers to the number of teeth for each outside saw blade. Electro-Blue; Non-Stick Coating
Teeth	24