


Edge of Arlington Saw & Tool, Inc.

124 South Collins
Arlington, TX 76010
Phone: 817-461-7171 • Fax: 817-795-6651
Toll Free: 888-461-7171
Email: info@eoasaw.com
Website: www.eoasaw.com

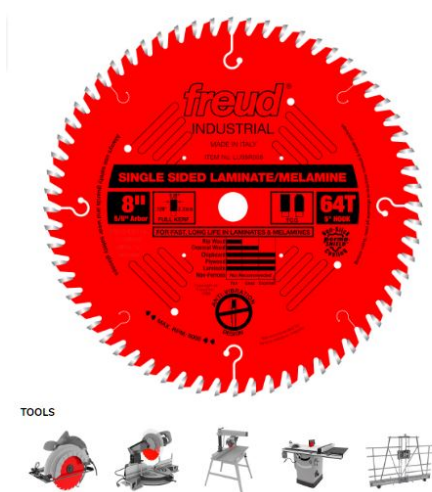

Item #LU98R008, Freud 8 in Dia, 5/8 in Arbor, 5 deg HA, 64 TCG Single-Sided Laminate/Melamine Blade: LU98R Series
\$119.29

Thank you for shopping with us!

Application: Long Life Production Blades for Single-Sided Laminates, Chipboard, and Other Man-made Materials

This fast-cutting blade is ideal for a perfect finish on one side of laminates and melamines. The Perma-SHIELD® coating makes these blades resistant to friction and heat buildup. Coated blades pull 1/3 less on the saw, which translates to 33% more cutting power. The 5° or 10° hook angle and a triple chip grind provide fast cuts and long cutting life.

Premium TiCo™ HI-Density Carbide Laminate Blend for Maximum Performance. Triple Chip Grind (TCG) Tooth Design with a positive hook angle for long life in production applications. Positive Hook Angle for fast cutting and easy feed. Perma-Shield® Non-Stick Coating reduces blade drag, protects the blade from corrosion and pitch buildup.

Ideal For: Single-Sided Laminates, Chipboard, and other Man-made Materials. Depth of cut (1/2" min to 2-3/4" max).

Tip: When cutting man-made products such as laminates, melamines, MDF, and particle board, use a blade with Triple Chip Grind (TCG) for longest blade life.

SPECIFICATIONS	
Diameter	8 in
Arbor	5/8 in
Kerf	.126 in
Hook Angle	5 deg
Plate	.087 in
Teeth	64 TCG
Type	Perma-SHIELD

SPECIFICATIONS

Manufacturer

Freud Tools